


NOTE: EAVE FLASHING REQUIRED WHERE

- ROOF SLOPE LESS THAN OR EQUAL TO 10°
- SOFFIT WIDTH LESS THAN OR EQUAL TO 100mm
- WIND ZONES ARE VERY HIGH OR EXTRA HIGH

SCALE 1:5

STOARMAT AFS REDIWALL	STOARMAT RENDER SYSTEM FLAT SOFFIT/WALL JUNCTION	RW 600
		2025

The information contained on this page is based on our experience and research at the date of issue. The detail is for use by Registered Architects, Licensed Designers or Chartered Engineers to assist in developing project details using Sto Systems. Stoanz Ltd reserve the right to alter or update information at any time without prior notice and it is the responsibility of the designer, project manager or Sto contractor to ensure they have and use the current Sto details and specifications on site.

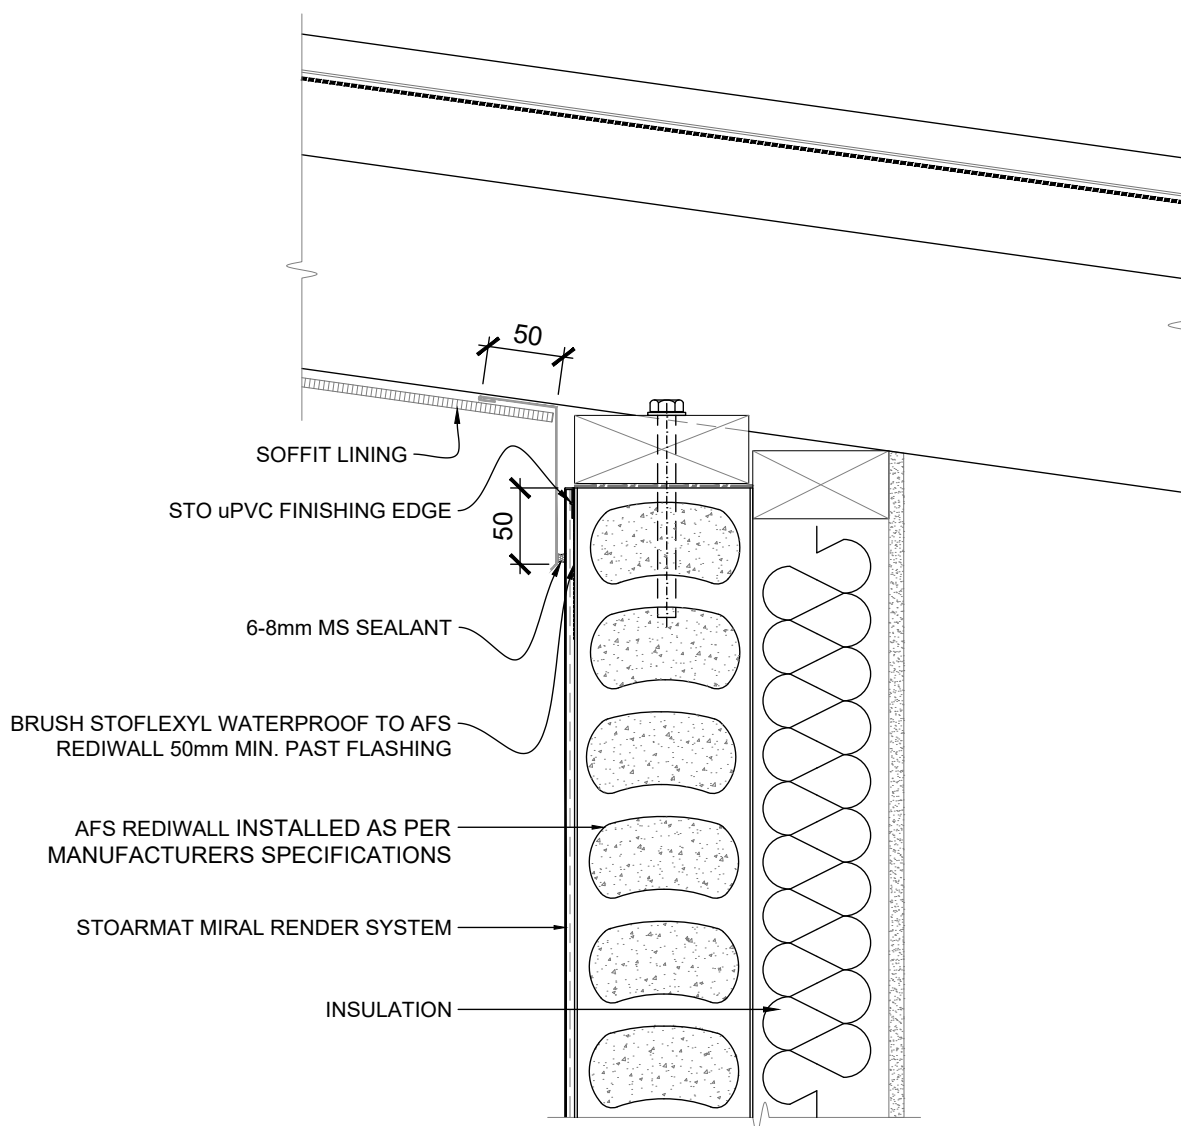

NOTE:

- MAX. ANGLE OF SOFFIT RESTRICTED TO BETWEEN 91° - 115°
- SOFFITS ARE FIXED AFTER PLASTERING

SCALE 1:5

STOARMAT AFS REDIWALL	STOARMAT RENDER SYSTEM RAKING SOFFIT - REVERSED	RW 601
		2025

The information contained on this page is based on our experience and research at the date of issue. The detail is for use by Registered Architects, Licensed Designers or Chartered Engineers to assist in developing project details using Sto Systems. Stoanz Ltd reserve the right to alter or update information at any time without prior notice and it is the responsibility of the designer, project manager or Sto contractor to ensure they have and use the current Sto details and specifications on site.